

REV.	REVISED DESCRIPTION	DATE	CHECKED
4.0	Change The Connecter	2010.5.17	

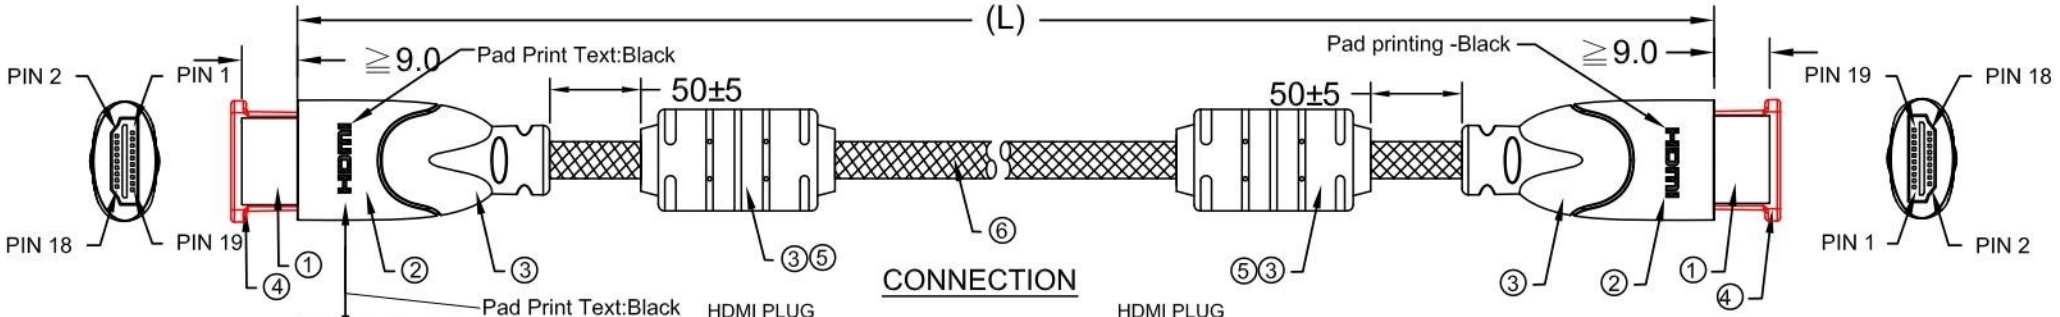


Back View

CONNECTION

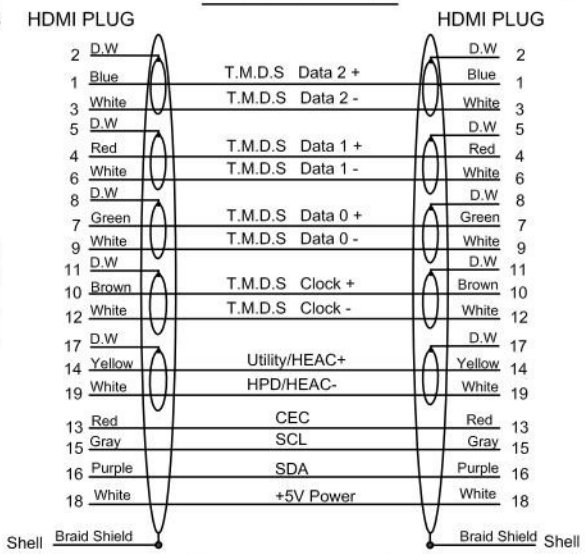

HANK SIZE

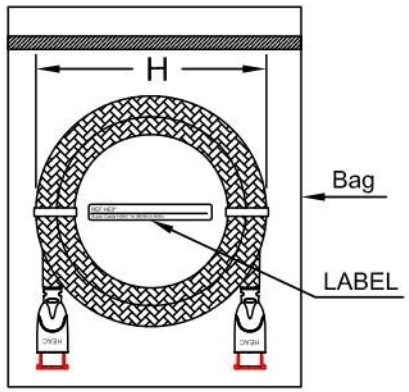

Packing:1PC/PE Bag

ERP NO.	PART NO.	LENGTH(L)	LENGTH(H)
A00-00816-0126	HH01	1000±30	Φ120±10
A00-00816-0127	HH02	2000±50	Φ140±10

ELECTRIC TESTING:

1.100% OPEN & SHORT TESTING
2. INSULATION RESISTANCE: ≧20MΩ.
3. CONDUCTOR IMPEDANCE: ≦5Ω.
4. VOLTAGE: 300V/0.1S.

NO.	DESCRIPTION
6	Cable Spec:{[(7/0.10Tc+F.PE)*1P+7/0.10Tc+AL/Mylar]*5+(7/0.10Tc +PE)*4C+FILLER+AL.F+16/10/0.10Tc 85%}*1C OD:6.0mm+ black PET Braid Black PVC Jacket Marking White:High Speed HDMI (R Logo)Cable With Ethernet UL(Logo) AWM 20276 VW-1 80°C 30V E81280-D CHING TAI(30AWG C18-71012*)
5	Ferrite Core (RH14.2*28.5*8mm/YT-0040/FC1-0027-00)
4	Plastic Cap-Transparent(OPT-110-024)
3	PVC - Black (M01-011-065/YT-1044)
2	Metal With Nickel Plated(OMT-050-02*)
1	HDMI Plug - Gold Plated(P37-0027G-00)

TOLERANCES UNLESS OTHERWISE STATED

X. = ± 1
.X = ± 0.2
.XX = ± 0.1

ERP NO.:				SAMPLE DWG NO:	
DOC No.:				REVISION	1.0
CUSTOMER:	CDM(CABLEMATIC)			UNIT	mm
CUSTOMER P/N:	HH0*			SCALE	NO
DESCRIPTION	HDMI PLUG BOTH END(GOLD)			PAGE NO	1/1
				DATE	2010.5.17
APPROVAL		CHECKED		DRAWN	YJ