
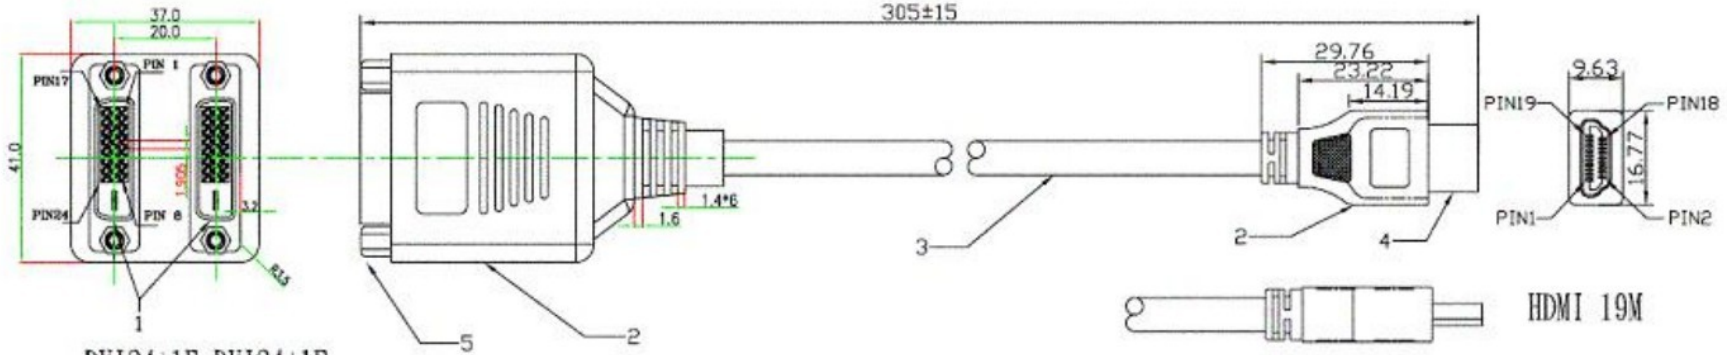


DVI24+1F-DVI24+1F

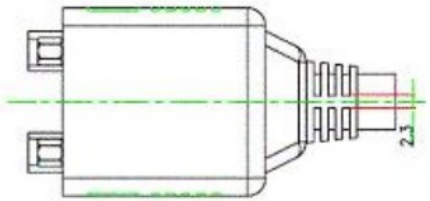

PIN ASSIGNMENT

HDMI 19M	DVI24+1F	DVI24+1F
12	PIN24	PIN24
10	PIN23	PIN23
11	PIN22	PIN22
	PIN21	PIN21
	PIN20	PIN20
8	PIN19	PIN19
7	PIN18	PIN18
9	PIN17	PIN17
19	PIN16	PIN16
17	PIN15	PIN15
18	PIN14	PIN14
	PIN13	PIN13
	PIN12	PIN12
5	PIN11	PIN11
4	PIN10	PIN10
6	PIN9	PIN9
16	PIN7	PIN7
15	PIN6	PIN6
	PIN5	PIN5
	PIN4	PIN4
2	PIN3	PIN3
1	PIN2	PIN2
3	PIN1	PIN1
SHELL	SHIELD	SHIELD

ELECTRICAL TEST:

1. CUTTENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 50Mohm
4. CONDUCTIVE RESISTANCE: 2ohm

No.	DESCRITION	UNIT	Q'TY
5	THUMB NUT #4-40UNC PLATED:GOLD	PCS	2
4	HDMI A MALE SOLDER TYPE CONTACT PLATED: GOLD	PCS	1
3	UL2919 30AWG*3C+24AWG*9C+AM+D+B OD8.5 COLOR:BLACK	PCS	1
2	PVC MOLDED BLACK IN COLOR		
1	DVI 24+1 FEMALE PLATED: GOLD	PCS	2

REV.	DESCRIPTION	DATE
A		06/06/15

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5'
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: NONE	UNIT: mm		
DRAWN: ERIC XU	06/06/15	DRAWN NAME:	SPL-H19M-D25Fx2-1FT
CHECKED	/ /		
APPROVED	/ /	PRODUCT NO.	
	SIZE A4	REV. A	FILE NAME: